


# 3-STRIP LONGSTRIP 14 mm Clic

## Technical information:

|                                                            |                                                                                                                                                          |  |
|------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------|--|
| <b>Produced according to:</b>                              | European parquet norm EN 13489 - 2002                                                                                                                    |  |
| <b>Dimension:</b>                                          | 14 x 215 x 2200 mm                                                                                                                                       |  |
| <b>Toplayer:</b>                                           | about 3.5 mm                                                                                                                                             |  |
| <b>Construction:</b>                                       | 3-layer construction; Hardwood toplayer, middlelayer and bottomlayer made of spruce<br>Toplayer about 3.5 mm<br>Middlelayer 8.8 mm<br>Bottomlayer 1.7 mm |  |
| <b>Boards/ m<sup>2</sup> per carton:</b>                   | 6/ 2.84                                                                                                                                                  |  |
| <b>Cartons/ m<sup>2</sup> per pallet:</b>                  | 50/ 142                                                                                                                                                  |  |
| <b>Slotted top layers per carton/ minimum length (mm):</b> | -                                                                                                                                                        |  |
| <b>Weight per carton/ pallet in kg:</b>                    | 24/ 1200                                                                                                                                                 |  |
| <b>Floor heating systems:</b>                              | Well suitable to very well suitable                                                                                                                      |  |
| <b>Fire behavior <sup>1)</sup>:</b>                        | Cfl-s1 and Dfl-s1 depending on wood specie and surface treatment                                                                                         |  |
| <b>Content of formaldehyd <sup>2)</sup>:</b>               | E1                                                                                                                                                       |  |
| <b>Content of pentachlorophenol (PCP) <sup>2)</sup>:</b>   | not detectable                                                                                                                                           |  |
| <b>Density kg/ m<sup>3</sup> <sup>2)</sup>:</b>            | about 600                                                                                                                                                |  |
| <b>Antislip performance:</b>                               | Live Satin USRV 11 <sup>2)</sup><br>Live Matt USRV 26 <sup>2)</sup><br>Live Natural USRV 40 <sup>2)</sup>                                                |  |
| <b>Abrasion resistance:</b>                                | Live Satin 70/ 1100 <sup>3)</sup><br>Live Satin 100 <sup>4)</sup>                                                                                        |  |
| <b>Thermal conductivity <sup>2)</sup>:</b>                 | 0.15 W/ mK                                                                                                                                               |  |
| <b>Areal thermal resistance <sup>5)</sup>:</b>             | 0.093 m <sup>2</sup> K/ W                                                                                                                                |  |

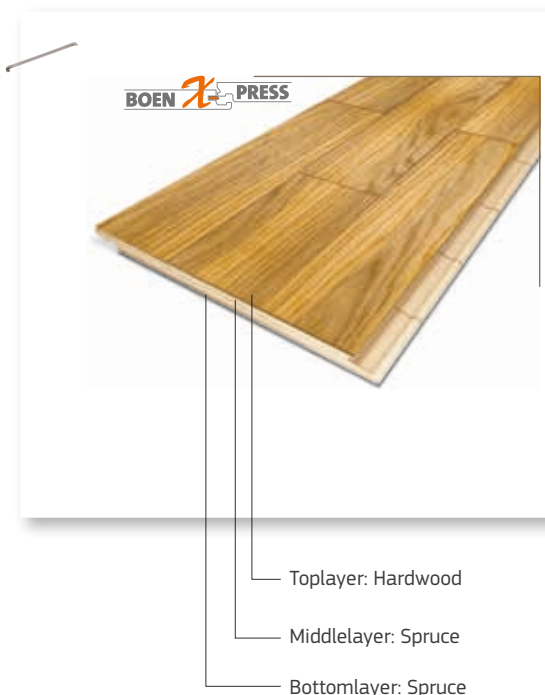

DOP 4658-1.1-07.2013



Emissionsgeprüftes Bauprodukt nach DIBt-Grundsätzen.

<sup>1)</sup> according to DIN EN 13501-1, <sup>2)</sup> according to DIN 14342, <sup>3)</sup> according to ENV 13696, <sup>4)</sup> according to DIN 68861, <sup>5)</sup> according to EN 12524